


York 125x22mm F/GLASS AL/OX FLAP DISC P80

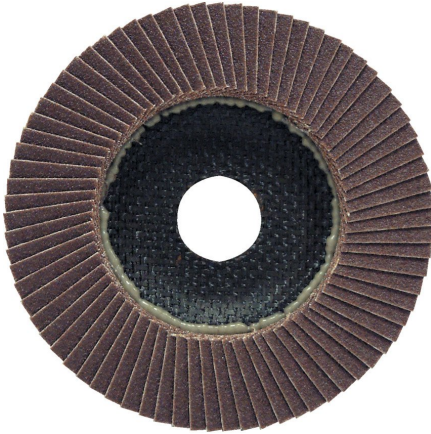

Aluminium Oxide Grade Glass Fibre-Backed (General-purpose, non-scratch). High performance alternative to sanding discs. Have the advantage over depressed centre grinding discs on light gauge sheet metal where surface finish is important. Overlapped abrasive strips slowly wear away revealing fresh abrasive, ensuring the disc always cuts effectively, reducing clogging, provides constant finish throughout disc life. No backing pads needed. Safe to use at 80m/s on any grinder. Tested at 150m/s and approved by the German Grinding Wheel Authority (DSA). Available in two grades and with two types of backing. 100mm Dia x 16mm Bore 15,300 MOS (rpm) 115mm Dia x 22mm Bore 13,300 MOS (rpm) 125mm Dia x 22mm Bore 12,000 MOS (rpm) 180mm Dia x 22mm Bore 8,600 MOS (rpm)

| Specifications | Details |
|-------------------------|---|
| Features | Constant Finish, Cool and Fast Cutting with less Loading, Decreased Risk of Burning, High Stock Removal, Long life, Low Noise (Quieter than a grinding disc), Low Vibration, No Backing Pad Required, Reduces Disc Change down Time |
| Bore Diameter | 22 mm |
| Maximum Operating Speed | 12,000 rpm |
| Backing Material | Glass Fibre-Backed (General-purpose, non-scratch). |
| Grit | P80 |
| Abrasive Material | Aluminium Oxide |
| Disc Diameter | 125 mm |
| Weight | 1 |
| Standards Met | Complies to oSa Regulations, Manufactured according to EN 13743 |
| SKU | YRK2209640GTSK |
| Disc Type | Conical (Type 29) |

| Specifications | Details |
|------------------|---------|
| Bore Thread Size | M14 |
| Brand | York |

