


## York 100x16mm F/GLASS AL/OX FLAP DISC P40

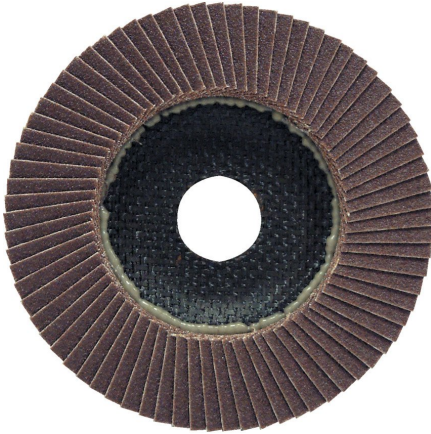

Aluminium Oxide Grade Glass Fibre-Backed (General-purpose, non-scratch). High performance alternative to sanding discs. Have the advantage over depressed centre grinding discs on light gauge sheet metal where surface finish is important. Overlapped abrasive strips slowly wear away revealing fresh abrasive, ensuring the disc always cuts effectively, reducing clogging, provides constant finish throughout disc life. No backing pads needed. Safe to use at 80m/s on any grinder. Tested at 150m/s and approved by the German Grinding Wheel Authority (DSA). Available in two grades and with two types of backing. 100mm Dia x 16mm Bore 15,300 MOS (rpm) 115mm Dia x 22mm Bore 13,300 MOS (rpm) 125mm Dia x 22mm Bore 12,000 MOS (rpm) 180mm Dia x 22mm Bore 8,600 MOS (rpm)

Specifications	Details
Features	Constant Finish, Cool and Fast Cutting with less Loading, Decreased Risk of Burning, High Stock Removal, Long life, Low Noise (Quieter than a grinding disc), Low Vibration, No Backing Pad Required, Reduces Disc Change down Time
Bore Diameter	16 mm
Maximum Operating Speed	15,300 rpm
Backing Material	Glass Fibre-Backed (General-purpose, non-scratch).
Grit	P40
Abrasive Material	Aluminium Oxide
Disc Diameter	100 mm
Weight	1
Standards Met	Complies to oSa Regulations, Manufactured according to EN 13743
SKU	YRK2209420GTSK
Disc Type	Conical (Type 29)

Specifications	Details
Bore Thread Size	M10
Brand	York

