

Mitutoyo

Digital ABS Caliper CoolantProof IP67 0-300mm, Blade, Thumb Roller Item number: 500-714-20



Description


This IP67 ABSOLUTE digimatic caliper allows reliable measurements in a wide range of situations and offers you the following benefits:


- Excellent resistance against water and dust (IP67 protection level) enabling use in machining situations that include splashing coolantfluid
- It is dustproof, complies with EN60529 and withstands temporary complete immersion in water without suffering any damage.
- Extraordinarily long battery life
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.

Features

| | |
|---------------------------------------|--|
| Range: | 0 - 300 mm |
| Depth bar: | flat |
| Thumb roller: | Yes |
| Max. Permissible Error E MPE: | ±0,03 mm |
| Max. Permissible Error S MPE: | ±0,05 mm |
| Data output: | Yes |
| Mass: | 350 g |
| Digital step: | 0,01 mm |
| Max. response speed: | Unlimited |
| Display: | LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm) |
| Delivered: | In a case, including 1 SR-44 battery |
| Battery life: | Approx. 5 years under normal use |
| ORIGIN (ABS-Zero): | Yes |
| Auto Power OFF after 20 min. non use: | Yes |
| Low voltage alarm: | Yes |

Dimensions

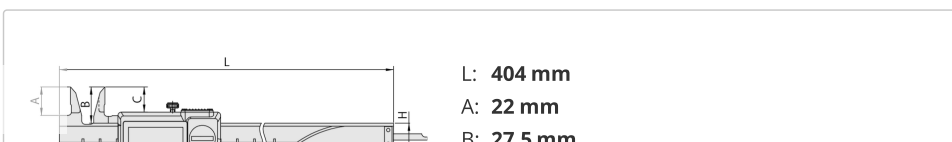



C: 19.8 mm

D: 64 mm

H: 20 mm

Accessories

Optional accessories:



Digimatic Cable with Data Button IP Type
1m, Caliper Type
05CZA624



Digimatic Cable with Data Button IP Type
2m, Caliper Type
05CZA625



USB Input Tool Direct (Digimatic USB)
Digi/Digi2, With Data Button IP Caliper Type
06AFM380A




U-WAVE fit, IP67 Type
Wireless Transmitter for Caliper
264-620



U-WAVE fit, Buzzer Type
Wireless Transmitter for Caliper
264-621



Connection Unit, U-WAVEfit
Waterproof Type
02AZF310



Depth Base Attachment for Caliper
125mm width for 300mm Range
050085-10



U-WAVE Bluetooth, IP67
Wireless Transmitter for Caliper
264-624



U-WAVE Bluetooth, Buzzer
Wireless Transmitter for Caliper
264-625

Spare parts

Consumable spares:



Battery SR44 1.5V
938882